



Coromin ALU

Chimney tape


Chimney tape made of pleated or pressed aluminium with a polyester lacquer layer, covered with the adhesive layer of butyl. Product guarantees an effective barrier for precipitation water. It ensures tight and durable treatment of chimneys, roof windows and roof hatches.

Advantages

- ✓ available in two press options
- ✓ resistant to UV-rays and ageing processes
- ✓ easy and fast working
- ✓ wide range of colours
- ✓ immediate sealing

Application

- ✓ to seal chimney, roof windows and roof hatches

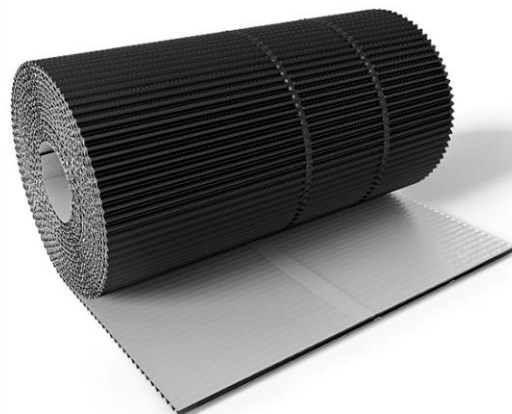

Characteristics

Material	aluminium, butyl rubber, polyester
Colour	brick, light brown, dark brown, anthracite, chestnut, black
Length	5 m
Width	300 mm
Nominal thickness of the paint film	7 µm
Joining strength: tape – ceramic tear off	≥90(N/50mm)
Joining strength: shear strength tape,	
- tape - clay roofing tile	≥400(N/50mm)
- tape - cement tile	≥380(N/50mm)
- strip - galvanized steel sheet	≥330(N/50mm)
Adhesion - resistance to tearing off the substrate, grid method	Rate 0, (highest)
Temperature of application	+5°C to +40°C

Installation

1. The surface of the installation needs to be well cleaned, clean, and dry.
2. Peel off the protective liner, put the tape in the right place, and press it down.
3. The installation should be started from the bottom of the chimney, successively on the sides and back of the chimney.
4. The tape must be about 20 cm longer than the chimney width.
5. In the corners, the tape should be joined "overlapping" or "chopped".
6. Fill the connection between the slat and the chimney with sealing compound.

The product has passed a positive assessment of its performance for the intended use: ventilation and roofing. Confirmation document: National Technical Assessment No. ITB-KOT-2020/1462 edition 1.

Storage

The product should be stored in dry and covered places, protected against deformations. Transport it by covered means of transport, adequately protecting against damage. Protect against freezing, getting wet. Remove the film protecting the bottom layer directly before installation.

Packaging

Quantity per box (pcs.):	4
Quantity on a pallet (pcs):	144

The information contained in this data sheet, particularly recommendations regarding the manner and conditions of application as well as the scope of use of the product, have been developed based on our experience, our best knowledge and in good faith. Apart from the information given in this data sheet, health and safety regulations, etc. must be observed. This technical data sheet supersedes all previous versions applicable to this product.