

Corokap V

Eaves closing comb with grid


The eaves closing comb with built-in ventilation reinforcement for higher air circulation. It protects the roof from birds, rodents and insects as well as blown-in leaves and twigs. Made of flexible PVC. Special footdistances allow the easy installation of gutters' hooks.

Advantages

- ✓ resistant to weather conditions
- ✓ increased ventilatio space
- ✓ prevents from blowing in leaves and twigs
- ✓ resistant to mechanical damages

Application

- ✓ protecting the open eaves area of the roof space
- ✓ for roofing ventilation

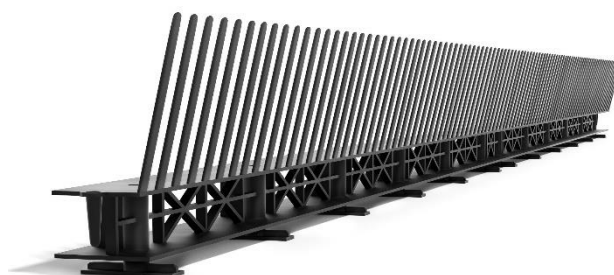

Characteristics

Material	PVC
Colour	black, light brown, brick red
Length	1000 mm
Height	85 mm
Vicat softening temperature	≥ 70°C
Tensile strength	≥ 26 MPa
Relative elongation at break,	≥ 5,5 %
Dimensional and shape stability at temp. over a period of 3 h, change in dimensions	≤ 1,0 % no defects, no shape changes

Storage

The product should be stored in dry and covered places, protected against deformations. Transport it by covered means of transport, adequately protecting against damage.

Packaging

Quantity per box (pcs.):	50
Quantity on a pallet (pcs):	1000

Installation

1. Place eaves closing comb on the support batten, and then fix it.
2. Install the next batten on which the tiles are mounted so that the tile enters the gutter between 1/4 and 1/2 of its width.

The product has passed a positive assessment of its performance for the intended use: ventilation and roofing. Confirmation document: National Technical Assessment No. ITB-KOT-2020/1462 edition 1.